




**Glued Up Panel (GU)**  
Chart Below

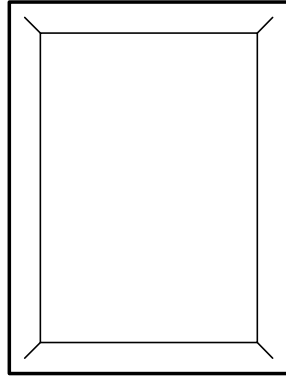

**Raised Panel Only (RP)**  
Chart Below



**Style 440**  
See Chart Below

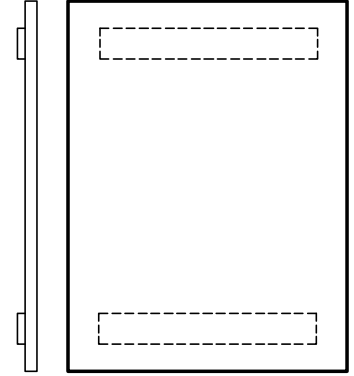

**Style 442**  
Panel Options: **Slab Only**  
See Chart Below

**Because of the potential of a solid slab door to warp, twist, or cup; Westwind only guarantees the 442 style.  
The battens are screwed 2 1/4" away from all slab edges. 442 Minimum Width is 8 1/2".**

Product	Treatment	Thickness of Part
GU	Rough	.9375"
GU38	180 Grit Face and Back w/ Rough Edges	.375"
GU12	180 Grit Face and Back w/ Rough Edges	.500"
GU58	180 Grit Face and Back w/ Rough Edges	.625"
GU34	180 Grit Face and Back w/ Rough Edges	.750"
440	180 Grit Face and Back	.780"
442	180 Grit Face and Back	.780"
RP	180 Grit Face and Back	Varies

GU's are available with a saw cut edge only.

All slabs over 12 total square feet or over 32" wide are subject to an upcharge.

440's thru 442's are available with any edge shown on our edge profile pages (starting on page 25).

Minimum square footage for GU's, 440, 442, and 441 is 1 square foot.

Any profiled slab ordered with one dimension less than 3" is subject to an upcharge.